
WALL THICKNESS, INSIDE DIAMETER & OUTSIDE DIAMETER BY PIPE SIZE

TABLE

	SCHEDULE 40 THICKNESS			SCHEDULE 10 THICKNESS			SCHEDULE 5 THICKNESS			
NOMINAL PIPE SIZE	WALL THICKNESS	INSIDE DIAMETER	OUTSIDE DIAMETER	WALL THICKNESS	INSIDE DIAMETER	OUTSIDE DIAMETER	WALL THICKNESS	INSIDE DIAMETER	OUTSIDE DIAMETER	
3/4"	0.113"	0.824"	1.050"	0.083"	0.884"	1.050"	0.920"	1.050"	0.065"	
1"	0.133"	1.049"	1.315"	0.109"	1.097"	1.315"	1.185"	1.315"	0.065"	
1-1/4"	0.140"	1.380"	1.660"	0.109"	1.442"	1.660"	1.530"	1.660"	0.065"	
1-1/2"	0.145"	1.610"	1.900"	0.109"	1.682"	1.900"	1.770"	1.900"	0.065"	
2"	0.154"	2.067"	2.375"	0.109"	2.157"	2.375"	2.245"	2.375"	0.065"	
2-1/2"	0.203"	2.469"	2.875"	0.120"	2.635"	2.875"	2.709"	2.875"	0.083"	
3"	0.216"	3.068"	3.500"	0.120"	3.260"	3.500"	3.334"	3.500"	0.083"	
3-1/2"	0.226"	3.548"	4.000"	0.120"	3.760"	4.000"	3.834"	4.000"	0.083"	
4"	0.237"	4.026"	4.500"	0.120"	4.260"	4.500"	4.334"	4.500"	0.083"	
6"	0.280"	6.065"	6.625"	0.134"	6.357"	6.625"	6.407"	6.625"	0.109"	
8"	0.322"	7.981"	8.625"	0.148"	8.329"	8.625"	8.407"	8.625"	0.109"	



- Table values reflect wall thickness, inside diameter and outside diameter for various Round Pipe sizes. Dimensions vary according to the schedule thickness (e.g. 40, 10 or 5). The most common thickness is schedule 40.
- Wall thickness is determined by taking the difference between outside and inside diameter dimensions of a Pipe and dividing the result by two.
- Technical information provided is for evaluation by technically skilled persons, with any use thereof to be at their independent discretion and risk. McNICHOLS shall have no responsibility or liability for results obtained or damages resulting from improper evaluation or use of Handrail Components.
- Wall Thickness
- Inside Diameter
- Outside Diameter

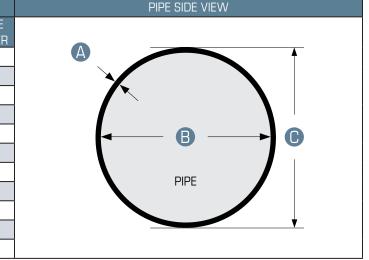